


**6" A.C. DIKE**

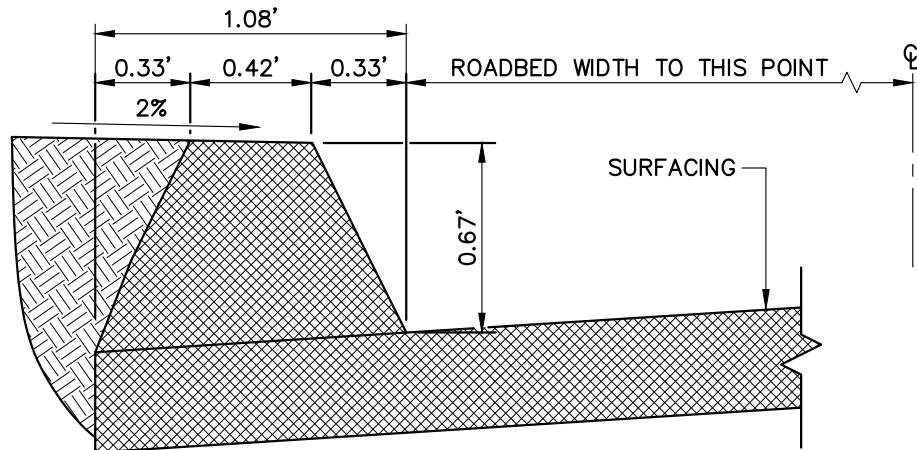

**8" A.C. DIKE**  
**NOT TO SCALE**

**NOTES:**

1. USE OF AC DIKE REQUIRES PRIOR APPROVAL OF CITY ENGINEER.
2. SPECIAL "AC BERM" MIX SHALL BE SUBMITTED TO CITY FOR APPROVAL PRIOR TO PLACEMENT.
3. MINIMUM PERMISSIBLE LONGITUDINAL GRADE 1.0% ON STREET WITH AC DIKES.
4. AC DIKE SHALL NOT BE USED ON RESIDENTIAL STREETS OR IN PLACE OF CONCRETE CURBS AND GUTTER.
5. AC DIKES SHALL GENERALLY BE USED WHERE FILL SLOPES ALONG ROADWAY ARE STEEPER THAN 4:1, MATERIAL IS SUSCEPTIBLE TO EROSION, OR WHERE ROADWAY GRADIENT EXCEEDS 3.0%.
6. ASPHALT SURFACING SHALL BE THOROUGHLY CLEANED AND A TACK-COAT, OR EPOXY SHALL BE PLACED, PRIOR TO PLACEMENT OF AC DIKE.

L:\Public Works - Engineering Standards\INDIO-127 5/19/2016 11:39 AM



*Juan Raya* 05/18/16  
 JUAN RAYA, P.E. DATE  
 CITY ENGINEER  
 RCE 68510

REV.	DRAWN BY:	APP'D:	DATE:



**ASPHALT CONCRETE DIKES**

STANDARD PLAN No.: **127**

MAY 2016