


NOTES:

- 1. "CASE A STREET LIGHT BEHIND SIDEWALK" IS TO BE USED WHEN THE SIDEWALK IS PLANNED TO BE ADJACENT TO CURB AND GUTTER, AND THE SIDEWALK IS PLANNED TO BE LESS THAN 8' WIDE.
- 2. "CASE B STREET LIGHT BEHIND CURB AND GUTTER" IS TO BE USED WHEN "CASE A" DOES NOT APPLY. THIS INCLUDES:
 - A. NO PLANNED SIDEWALK
 - B. SIDEWALK PLANNED BUT NOT ADJACENT TO CURB AND GUTTER
 - C SIDEWALK PLANNED ADJACENT TO CURB BUT IS PLANNED TO BE 8.0' WIDE OR WIDER
 - D. MEANDERING SIDEWALK PLANNED
- 3. THIS STANDARD APPLIES TO BOTH RESIDENTIAL AND NONRESIDENTIAL AREAS.



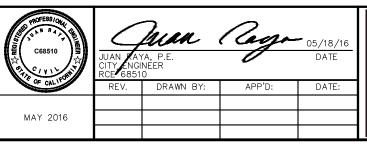

STREET LIGHT LOCATION RELATIVE TO CURB/SIDEWALK

STANDARD PLAN No.:

203

Engineering Standards\INDIO-203 5/19/2016 12: