


"T" INTERSECTION AND CUL-DE-SAC

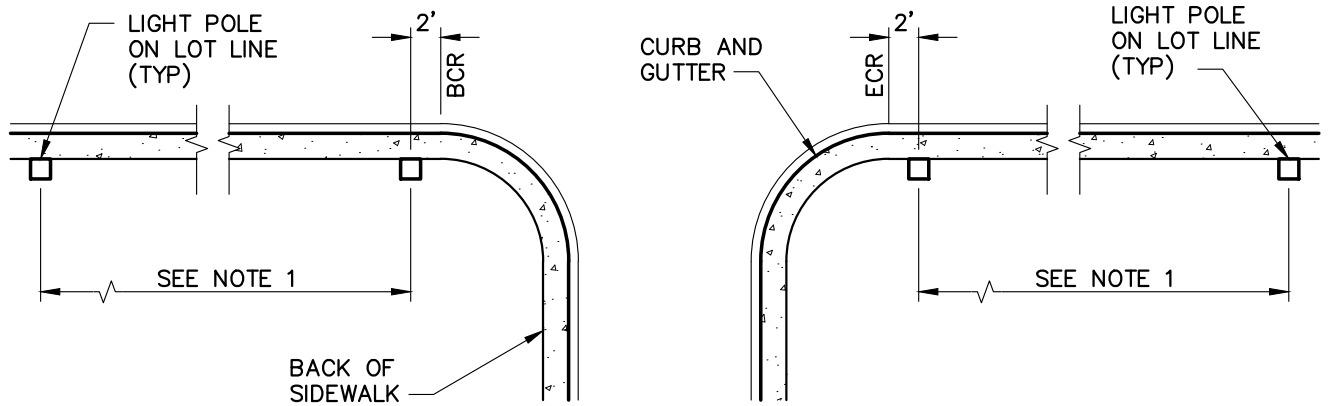

REGULAR INTERSECTION

NOTES:

1. LIGHTS SHALL BE PLACED AT ALL INTERSECTIONS, END OF CUL-DE-SACS, AND SPACING SHALL NOT EXCEED 300 FT.
2. LIGHTS MAY BE STAGGERED ON BOTH SIDES OF STREET OR ALL LIGHTS MAY BE PLACED ON ONE SIDE OF STREET.
3. LIGHTS SHALL BE PLACED ON LOT LINES WHERE POSSIBLE.
4. #3.5 PULL BOXES ARE REQUIRED BETWEEN STREET LIGHTS WHEREVER THERE IS MORE THAN 300' BETWEEN POLES, AND ALSO WHERE A CONDUIT RUN CHANGES DIRECTION OR CROSSES A STREET.

L:\Public Works - Engineering Standards\INDIO-204 5/19/2016 12:10 PM



Juan Raya 05/18/16
 JUAN RAYA, P.E. DATE
 CITY ENGINEER
 RCE 68510

REV.	DRAWN BY:	APP'D:	DATE:



**STREET LIGHT LOCATION
 ALONG STREET -
 RESIDENTIAL AREA**

STANDARD PLAN No.: **204**

MAY 2016