
## NOTES:

1. LED INTERNALLY ILLUMINATED STREET NAME SIGNS (IISNS) SHALL BE TEMPLE EDGE-LIT RAZOR, ATTACHED WITH PELCO-5146 OR PELCO-5015 UNDER HANG MOUNTING BRACKETS ON TRAFFIC SIGNAL POLE IISNS STRAIGHT ARM MOUNTING DETAIL PER CITY OF INDIO STANDARD NO. 212.

N.T.S.

- 2. IISNS SIGN LETTERING SHALL BE FHWA SERIES E 2000 8" UPPER CASE LETTERING AND 6" LOWER CASE LETTERING. AND FHWA SERIES D 2000 OR SERIES C 2000 WHEN NECESSARY.
- 3. ALL IISNS SHALL BE DOUBLE FACED.
- 🕰 4. IISNS SIGN PANEL BACKGROUND COLOR SHALL BE 3M 3630—167 BRIGHT BLUE
  - 5. IISNS SHALL DISPLAY A SUFFIX FOR THE STREET TYPE (I.E. AVE, BLVD, RD, DR, ETC.) SEE STANDARD DRAWING 161 FOR A COMPLETE LIST. EXCEPTION TO ABOVE IS IF THE STREET TYPE NAME COMES AT THE BEGINNING OF THE STREET NAME (I.E. AVENUE 42, ETC.) THEN SPELL OUT THE ENTIRE STREET TYPE.
  - 6. IISNS LAYOUT REQUIRES SIGNED DESIGN APPROVAL BY CITY ENGINEER PRIOR TO FABRICATION.
  - 7. CITY LOGO SPECIFICATIONS TO BE PROVIDED TO FABRICATOR BY CITY ENGINEER.



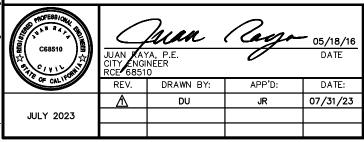

INTERNALLY ILLUMINATED STREET NAME SIGN (IISNS)-GENERAL LAYOUT

STANDARD PLAN No.:

210