


CASE A

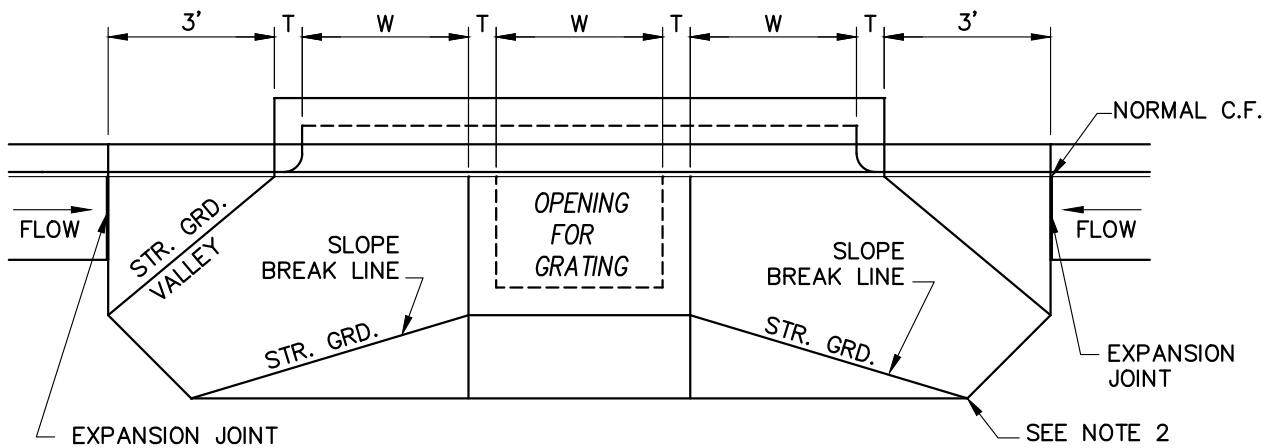

CASE B - SUMP

NOTES:

1. GUTTER DEPRESSIONS SHALL BE CASE "A" UNLESS OTHERWISE SPECIFIED.
2. ELEVATIONS AT OUTER CORNERS SHOWN ON THE PROJECT DRAWINGS. IF NO ELEVATIONS ARE SPECIFIED, THE OUTER EDGE OF THE GUTTER DEPRESSION SHALL CONFORM TO THE FINISHED STREET SURFACE.
3. A = 4 FEET UNLESS OTHERWISE SPECIFIED.
T = SEE STD 302B
W = SEE STD 302B
4. WHERE NO CURB EXISTS, CURB SHALL BE CONSTRUCTED BETWEEN ENDS OF GUTTER DEPRESSION. CURB SECTION SHALL CONFORM TO A STD CURB APPROVED BY THE CITY ENGINEER.
5. DEPRESSION SHALL BE CLASS 560-C-3250 P.C. CONCRETE, PLACED OVER COMPACTED NATIVE OR AGGREGATE BASE MATERIALS. COMPACTION SHALL BE 90% RELATIVE TO MAXIMUM, EXCEPT IN THE TOP 12" WHERE THE RELATIVE COMPACTION SHALL BE 95%, MINIMUM.

L:\Public Works - Engineering Standards\INDIO-304 5/19/2016 12:00 PM



JUAN RAYA, P.E. CITY ENGINEER RCE 68510		05/18/16	
		DATE	
REV.	DRAWN BY:	APP'D:	DATE:



**GUTTER DEPRESSION
FOR GRATE OPENING
CATCH BASIN**

STANDARD PLAN No.: **304**

MAY 2016